


Screw clamping terminal block- UKJ-6/3×6- 011318

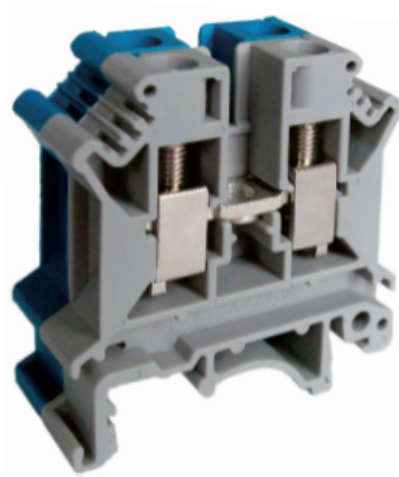

Screw clamping terminal block, rated voltage:800V , Max. operating current:57A, connection method : screw connection, number of connections : 4, crimping range : 0.2mm² -10mm² ,thickness:16.4mm, height:46.5mm, color : grey&blue, mounting type : TH35-7.5、TH35-15、G32-15、G32-18

Product parameter

Parameter	Data
Packing unit (PCS)	28
NW per piece(g)	/
Layers	1
Number of connections	4
Rated cross section(mm ²)	10
Color	grey、 blue
Insulation material	PA
Flame retardant grade (UL94)	V0
Rated voltage(V)	800
Rated current(A)	57
Temperature of insulation material	-40℃~+125℃
Wire feed	Both sides of the terminal

Product certification

Parameter	Data
Certification logo	CE
Certification logo	

Parameter	Data
	CCS
Certification logo	IECE_x
Certification logo	 INMETRO
Certification logo	RoHS

Technical data

Parameter	Data
Connection Method	Screw connection
Screw thread	M4
Stripping length(mm)	10
Tightening torque	1.5-1.8
Solid conductors(mm ²)	0.2-10
Stranded conductors(mm ²)	0.2-6
Operating temperature (°C)	-40°C~+105°C
Ambient temperature (storage/transportation) (°C)	-25°C~+60°C
Relative humidity	30%~90%
Connection in acc. with standard	IEC 60947-7-1

Dimension

Parameter	Data
Width(mm)	16.4
Thickness(mm)	16.4
Height(mm)	46.5