


REV	CONTENT	CHK	DATE
V0.0	CONTENT	SYJ	25.03.04



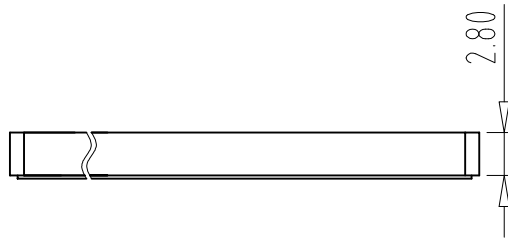


Electrical :

1.RoHS Compliance

2.Operating Temperature : -40℃~+105℃

3."★" is the key quality control point

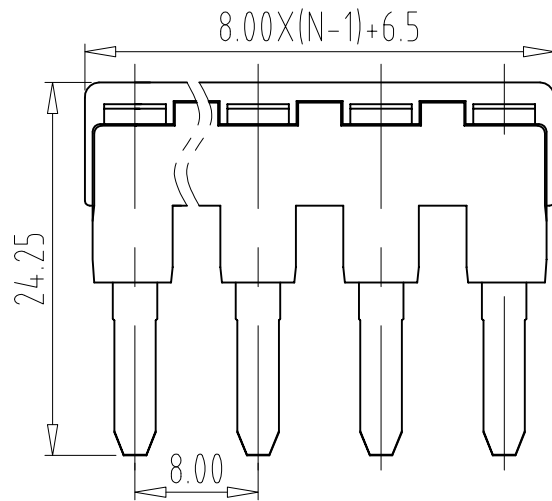

① Series NO.

② Pitch

③ Poles

2 2Contacts

3 3Contacts

...

18 18Contacts

④ Color:

GY-Grey

BU-Blue

BK-Black

GN-Green

OG-Orange

RD-Red

YE-Yellow

WH-White

PE-Yellow & Green

BE-Beige

3	PIN HEADER	XX	P	Copper	镀锡
2	Cover	XX	1	PA66 UL94V-0	SEE NOTE
1	HOUSING	XX	1	PA66 UL94V-0	SEE NOTE
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
DWG.	SYJ	DATE	25.03.04	SIZE	A4 UNITS mm SHEET/OF 1 / 1
CHK.		DATE		SCALE	1:1
APP.		DATE		NAME	GFBSFA8-X-X
Grolten 宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD.				DWGNO.	XXXX

A	Total Pitch Tolerances in mm									Nominal dimension range in mm								$\perp$		$\equiv$	$—$		$//$		
	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 250	over 350	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	over 0	over 10	all	over 0	over 100	over 150
	to 30	to 53	to 70	to 90	to 115	to 150	to 250	to 350	to 500	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10	to 100	to 150		to 100	to 150	to 150
	± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.60	± 0.70	± 0.85	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	0.3	0.2	0.3	0.5
	6									5								4							