


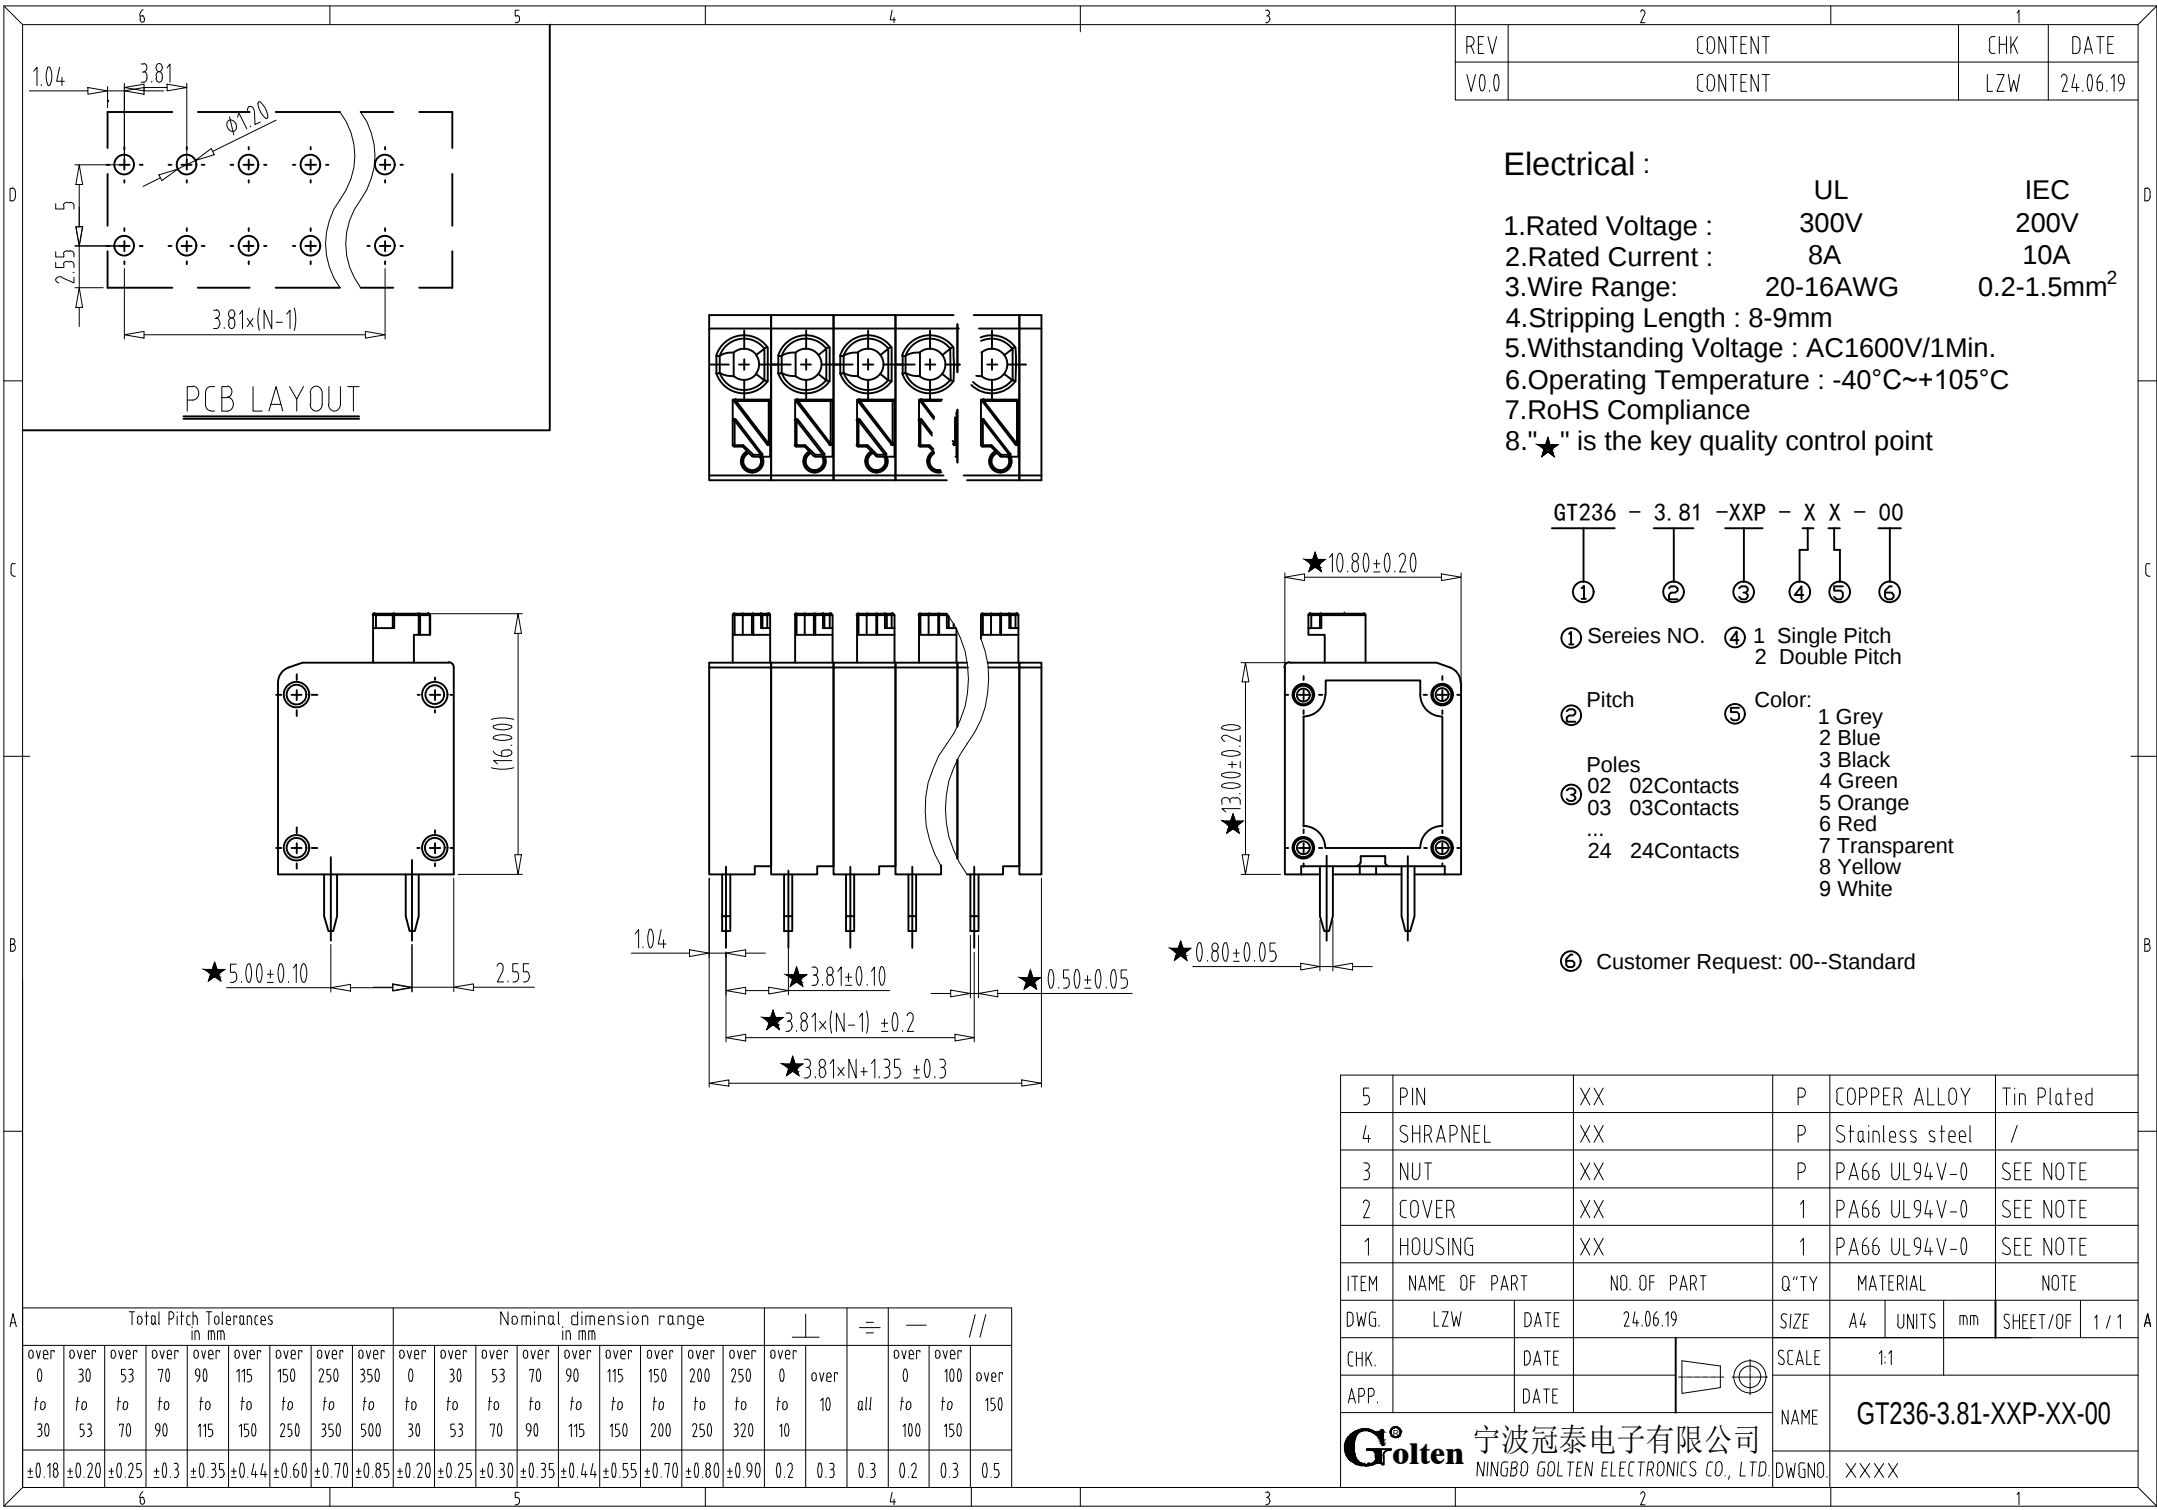

REV	CONTENT	CHK	DATE
V0.0	CONTENT	LZW	24.06.19

Electrical :

	UL	IEC
1.Rated Voltage :	300V	200V
2.Rated Current :	8A	10A
3.Wire Range:	20-16AWG	0.2-1.5mm ²
4.Stripping Length :	8-9mm	
5.Withstanding Voltage :	AC1600V/1Min.	
6.Operating Temperature :	-40°C~+105°C	
7.RoHS Compliance		
8."★" is the key quality control point		

GT236 - 3.81 -XXP - X X - 00

① Sereies NO. ④ 1 Single Pitch
2 Double Pitch

② Pitch ⑤ Color: 1 Grey
2 Blue
3 Black
4 Green
5 Orange
6 Red
7 Transparent
8 Yellow
9 White

③ Poles 02 02Contacts
03 03Contacts
... 24 24Contacts

⑥ Customer Request: 00--Standard

5	PIN	XX	P	COPPER ALLOY	Tin Plated
4	SHRAPNEL	XX	P	Stainless steel	/
3	NUT	XX	P	PA66 UL94V-0	SEE NOTE
2	COVER	XX	1	PA66 UL94V-0	SEE NOTE
1	HOUSING	XX	1	PA66 UL94V-0	SEE NOTE
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
DWG.	LZW	DATE	24.06.19	SIZE	A4 UNITS mm SHEET/OF 1 / 1
CHK.	DATE			SCALE	1:1
APP.	DATE			NAME	GT236-3.81-XXP-XX-00
				DWGNO.	XXXXX