


2		1	
REV	CONTENT	CHK	DATE
V0.0	CONTENT	SYJ	25.03.03

Electrical :

1. The surface of plastic parts is smooth and clean, without dent. Defects such as cracks
2. The limit deviation of dimension without tolerance is GB/T1084-m
- 3.Operating Temperature : -40°C~+105°C
- 4.RoHS Compliance
- 5."★" is the key quality control point

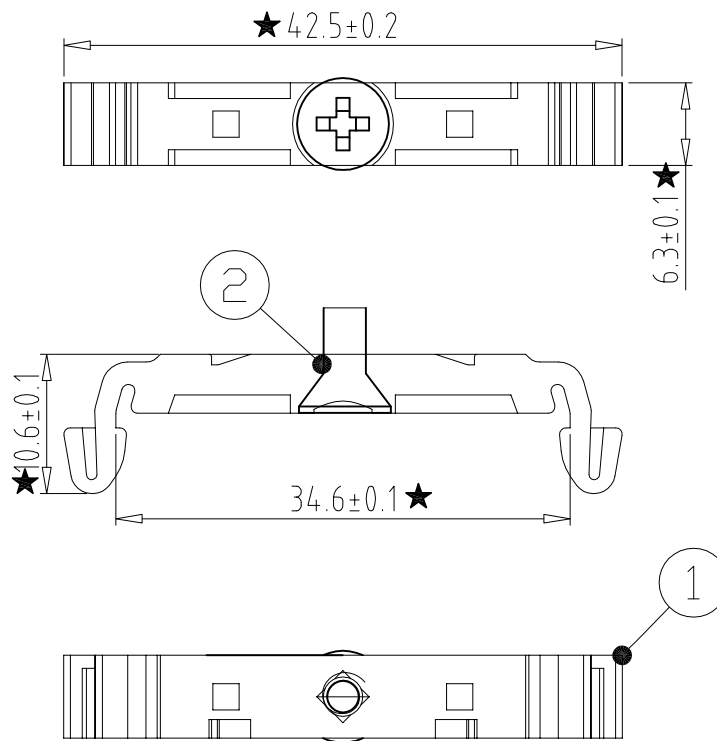

<u>GTU35</u>	-	<u>6. 3</u>	-	<u>01P</u>	-	<u>X</u>	<u>X</u>	-	<u>00</u>
①		②		③		④	⑤		⑥
① Series NO.		④ 1 Single Pitch		2 Double Pitch					
② Pitch		⑤ Color: 1 Grey		2 Blue					
				3 Black					
				4 Green					
				5 Orange					
				6 Red					
				7 Transparent					
				8 Yellow					
				9 White					
⑥ Customer Request: 00--Standard									

2	SCREW		XX		1	STEEL		Zn Plated	
1	HOUSING		XX		1	PA66 UL94V-0		SEE NOTE	
ITEM	NAME OF PART		NO. OF PART		Q"TY	MATERIAL		NOTE	
DWG.	SYJ	DATE	25.03.03		SIZE	A4	UNITS	mm	SHEET/OF 1 / 1
CHK.		DATE			SCALE	1:1		GTU35-6.3-01P-XX-00	
APP.		DATE			NAME				
 宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD.						DWGNO.	XXXX		
			2			1			

A	Total Pitch Tolerances in mm									Nominal dimension range in mm									$\perp$		$\equiv$	$-$		$//$		
	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 250	over 350	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	over 0	over 10	all	over 0	over 100	over 150	
	to 30	to 53	to 70	to 90	to 115	to 150	to 250	to 350	to 500	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10	to 10		to 100	to 150	to 150		
	± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.60	± 0.70	± 0.85	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	0.2	0.3	0.5		
	6									5									4							