




2		1	
REV	CONTENT	CHK	DATE
V0.0	CONTENT	ZCL	24.07.26

Electrical :

- 1.Rated Current : 26A
- 2.Torque Value : M3 ,0.5N.m
- 3.RoHS Compliance
- 4."★" is the key quality control point

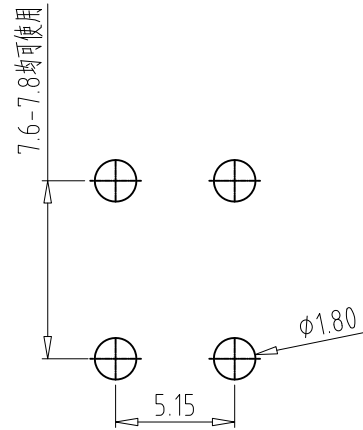

PCB LAYOUT

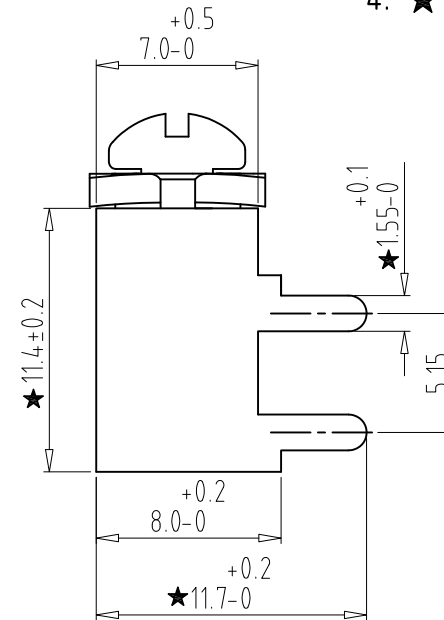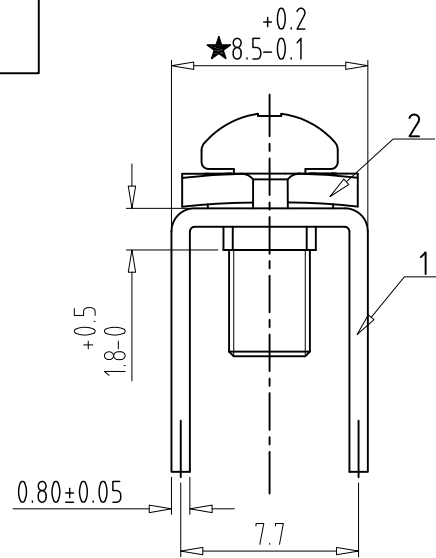

A	Total Pitch Dimension range in mm						Nominal dimension range in mm						radii		chamfers				short angle sid				— //		
	0 to 6	over 6 to 16	over 16 to 30	over 30 to 120	over 120 to 250	over 250 to 500	0 to 6	over 6 to 10	over 10 to 16	over 16 to 30	over 30 to 53	0.5 to 3	over 3	over 0 to 6	over 6 to 10	over 10 to 30	over 30 to 50	over 50 to 120	over 120 to 400	all	over 0 to 120	over 120 to 200	over 200		
	±0.07	±0.12	±0.15	±0.2	±0.25	±0.40	±0.09	±0.12	±0.15	±0.17	±0.2	±0.1	±0.2	±0.1	±0.2	±0.5	1°	30°	20°	10°	0.1	0.2	0.3	0.4	

2	Screw	XXXX	1	Steel	Ni Plated
1	Pin	XXXX	1	Copper Alloy	Tin Plated
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	ZCL	DATE	24.07.26	SIZE	A4 UNITS mm SHEET/OF 1 / 1
CHK.	DATE			SCALE	1 : 1
APP.	DATE			NAME	K15-00
				DWGNO.	XXXX

Golten

宁波冠泰电子有限公司
NINGBO GOLTEN ELECTRONICS CO., LTD.