

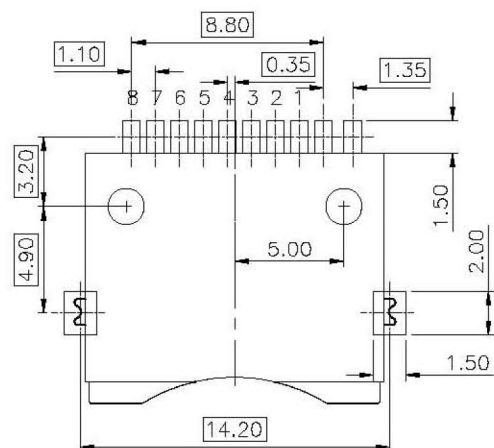
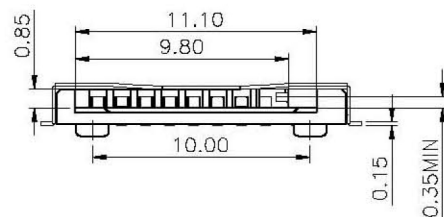


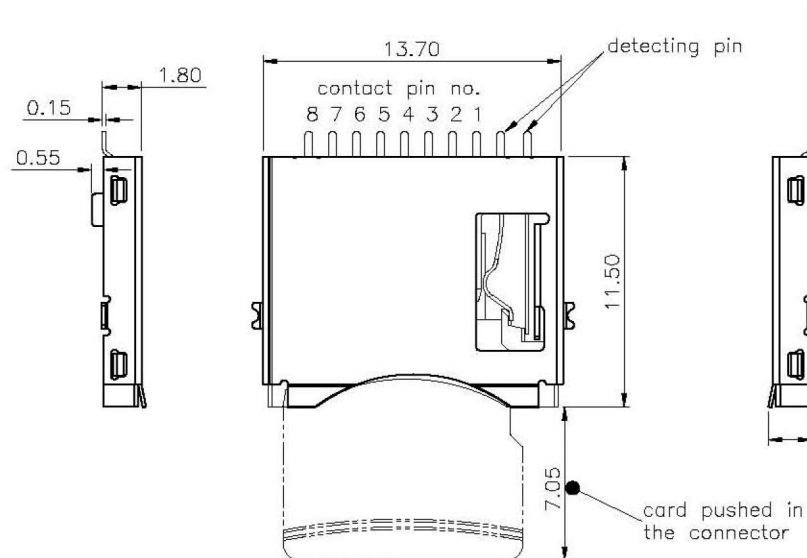

RECOMMENDED P.C.B LAYOUT(TOP VIEW)
GENERAL TOLERANCE ± 0.05

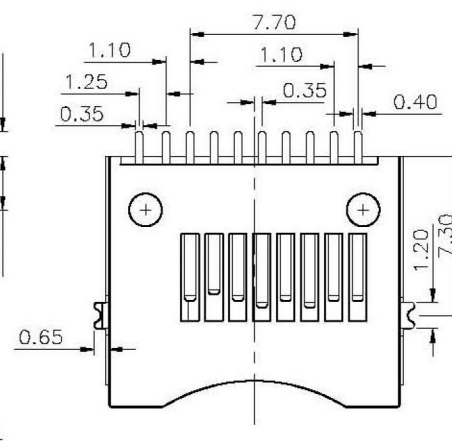



Pin No.	NAME	TYPE
1	DAT 2	I/O/PP
2	CD/DAT 3	I/O/PP
3	CMD	PP
4	VDD	S
5	CLK	I
6	VSS	S
7	DAT0	I/O/PP
8	DAT1	I/O/PP

Specification:

- Electrical Characteristics:
Contact Current Rating: 0.5 Amperes.
Dielectric Withstanding Voltage: AC500V r.m.s
Insulation Resistance: 1000 M Ω Minimum
Contact Resistance: 40m Ω Maximum
- Environmental:
Operating Temperature: $-20^{\circ}\text{C} \sim +80^{\circ}\text{C}$

WITHOUT CARD, SWITCH OPENED IN THE CONNECTOR;
WHEN CARD PUSHED-IN, SWITCH WAS CLOSED

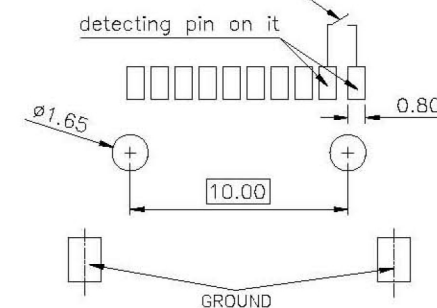

X.± 0.25	X°.± 1°	UNITS mm	NAME(INTENDED USE) Tflash Conn.(简易式)	 NINGBO KLS ELECTRONIC CO.,LTD.								
.X± 0.15	.X°.± 0.2°	MAT'L	PART NO.(INTENDED USE) L-KLS1-TF-014-H1.8-R	TITLE: Tflash Conn.(简易式)								
.XX± 0.08	.XX°.± 0.05°	NONE	APPD: David 5/14 2010	DWG NO.: L-KLS1-TF-014-H1.8-R								
.XXX± 0.05	.XXX°.± 0.01°	FINISH NONE	CHKD: Kenlin 5/03 2010	 <table><tr><td>SCALE</td><td>SHEET</td><td>REV.</td></tr><tr><td>1:1</td><td>1/1</td><td>X1</td></tr></table>			SCALE	SHEET	REV.	1:1	1/1	X1
SCALE	SHEET	REV.										
1:1	1/1	X1										
		Q'TY NONE	DR: Billyang 5/03 2010									