


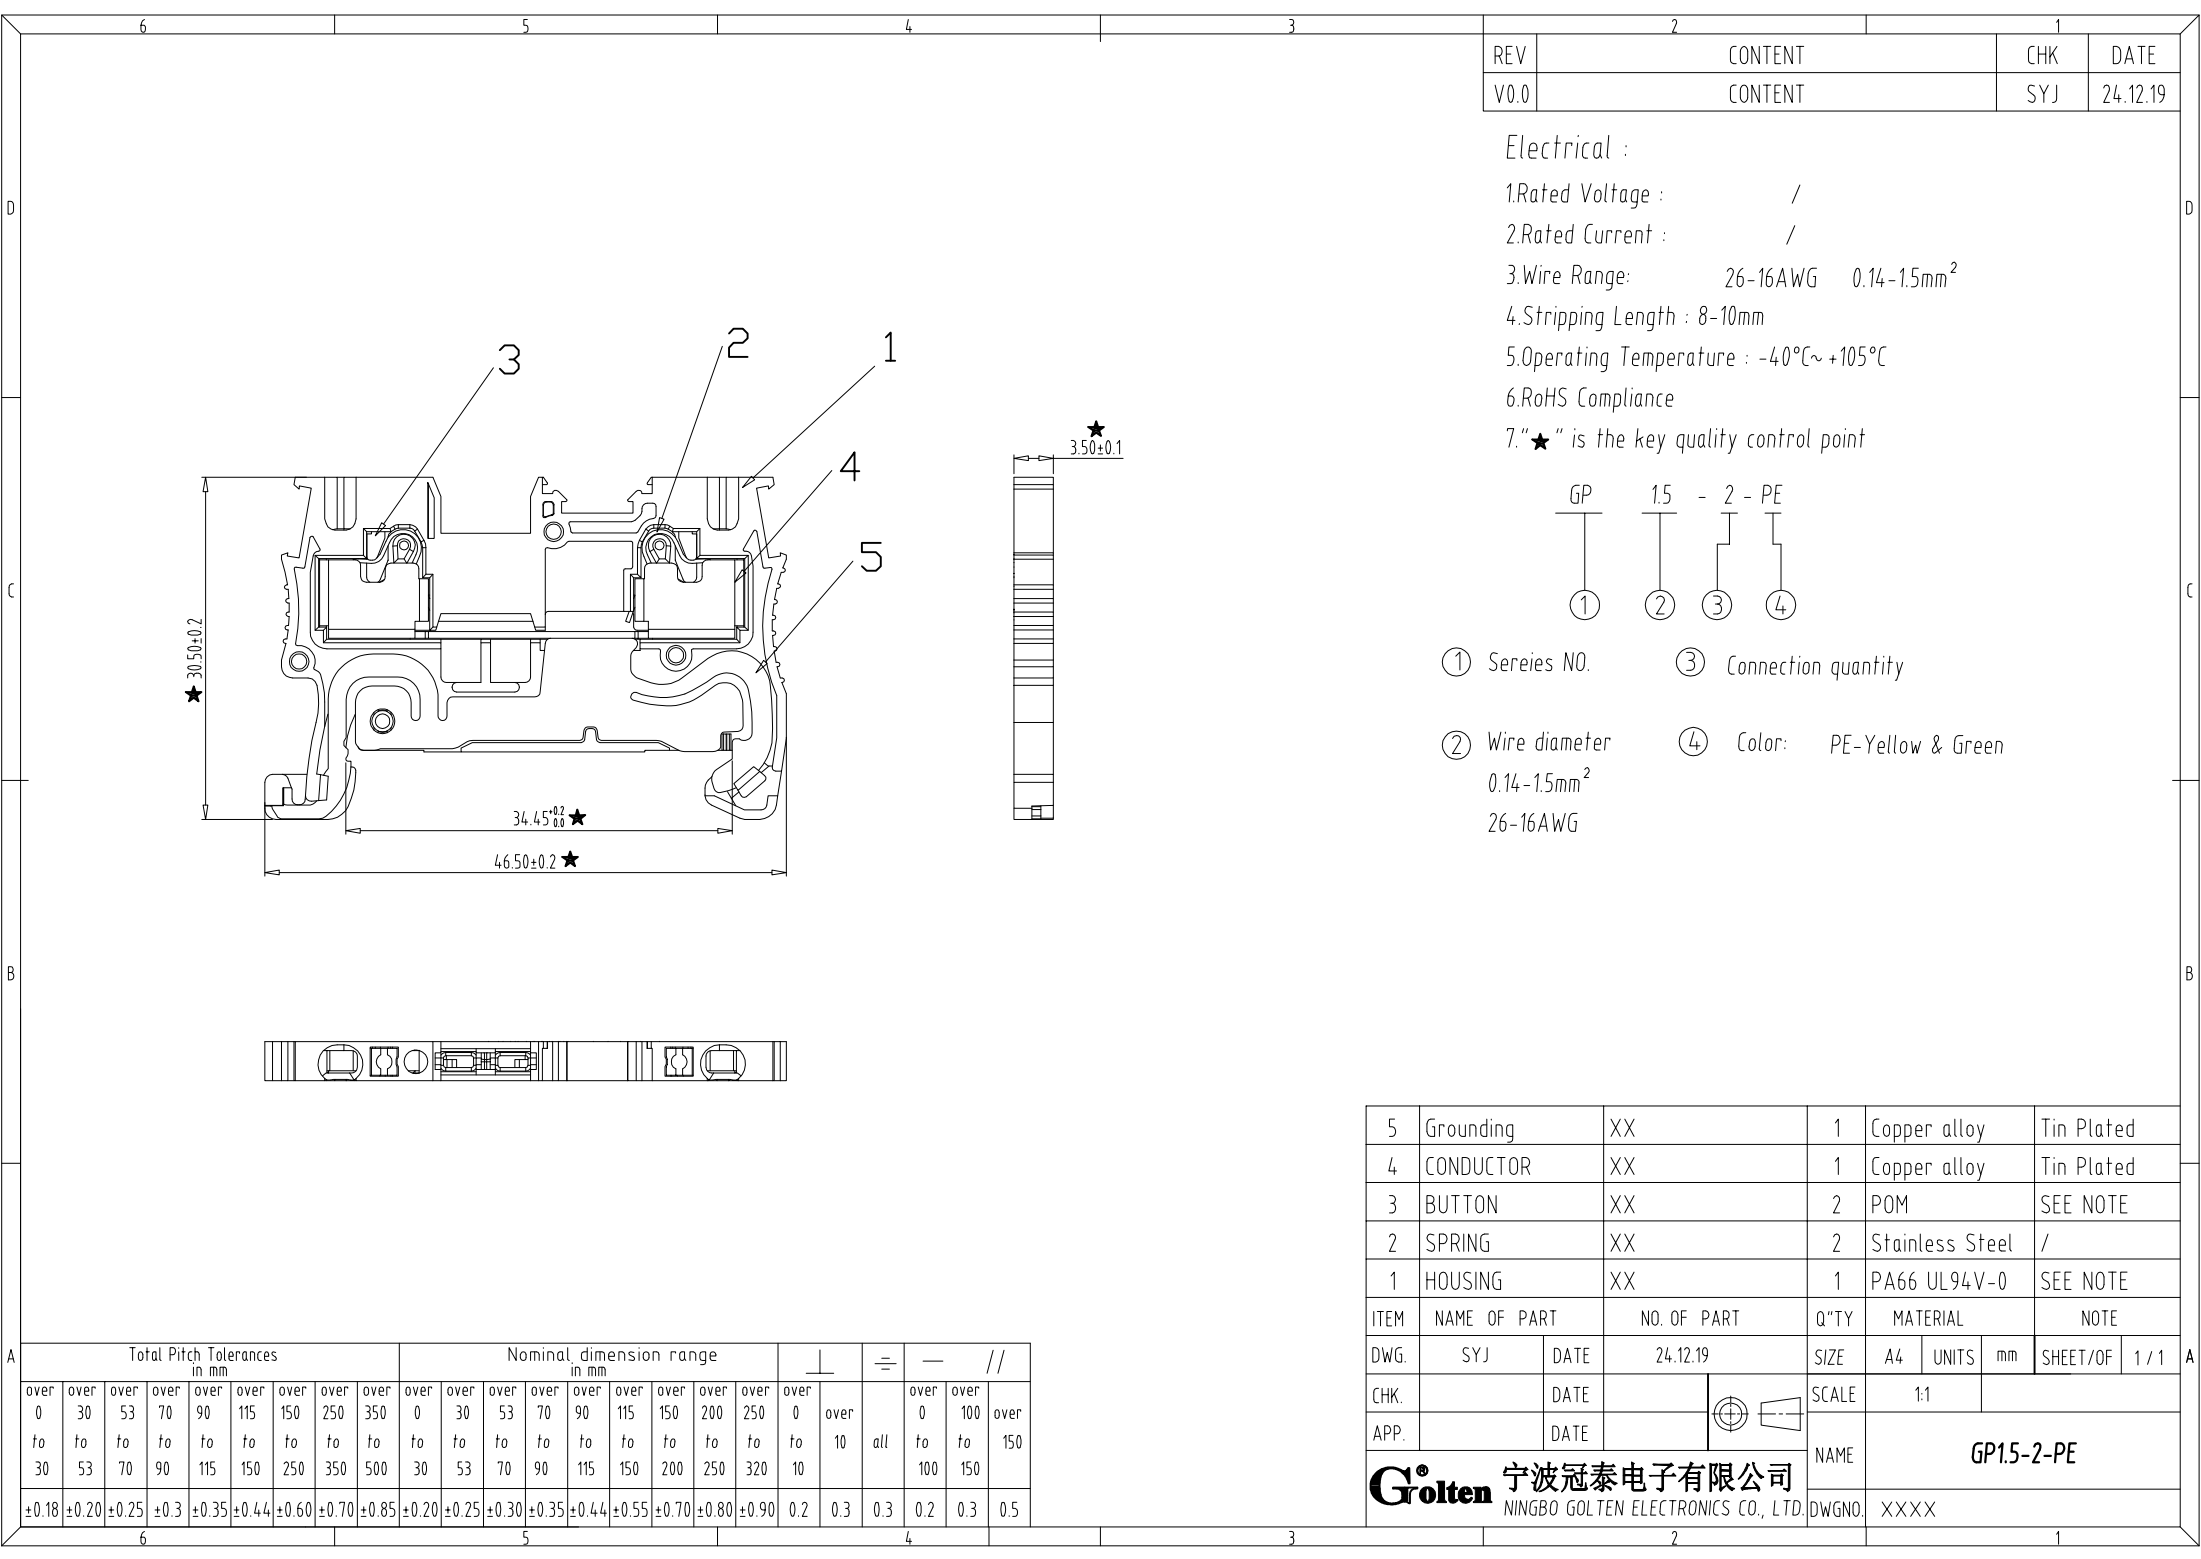

2		1	
REV	CONTENT	CHK	DATE
V0.0	CONTENT	SYJ	24.12.19

Electrical :

1.Rated Voltage : /

2.Rated Current : /

3.Wire Range: 26-16AWG 0.14-1.5mm²

4.Stripping Length : 8-10mm

5.Operating Temperature : -40°C~+105°C

6.RoHS Compliance

7."★" is the key quality control point

GP

1.5

-

2

-

PE

①

②

③

④

① Sereies NO.

② Wire diameter
0.14-1.5mm²
26-16AWG

③ Connection quantity

④ Color: PE-Yellow & Green

5	Grounding	XX	1	Copper alloy	Tin Plated				
4	CONDUCTOR	XX	1	Copper alloy	Tin Plated				
3	BUTTON	XX	2	POM	SEE NOTE				
2	SPRING	XX	2	Stainless Steel	/				
1	HOUSING	XX	1	PA66 UL94V-0	SEE NOTE				
ITEM	NAME OF PART		NO. OF PART	Q"TY	MATERIAL	NOTE			
DWG.	SYJ	DATE	24.12.19	SIZE	A4	UNITS	mm	SHEET/OF	1 / 1
CHK.		DATE		SCALE	1:1				
APP.		DATE		NAME	GP1.5-2-PE				
 宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD.				DWGNO.	XXXX				
			2				1		