


Push-in terminal block -
UJ6-16/1X2JD-421517



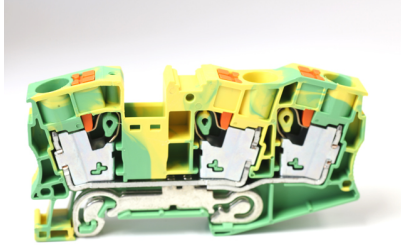

Push-in terminal block , connection method:Push-in connection , number of connections : 3 , crimping range : 1.5mm² -16 mm² , AWG : 20-4 , Thickness:10.2mm , height: 49.6mm , color : yellow and green , mouting type : TH35-7.5、 TH35-15

Product parameter

Parameter	Data
Number of connections	3
Layers	1
Rated cross section(mm ²)	16
Color	yellow and green
Insulation material	PA
Flame retardant grade	V0
Rated voltage(V)	/
Rated current(A)	/
Temperature of insulation material	-40 ~ +125
Wire feed	Above the terminal
Packing unit (PCS)	14
NW per piece(g)	61.3

Product certification

Parameter	Data
Certification logo	
Certification logo	
Certification logo	

Parameter	Data
	RoHS

Technical data

Parameter	Data
Connection method	Spring connection
Stripping length(mm)	22
Solid conductor (mm ²)	1.5-25
Solid conductor AWG	20-4
Stranded conductor (mm ²)	1.5-16
Stranded conductor AWG	20-10
Operating temperature ()	-40 ~ +105
Ambient temperature (storage/transport)	Ambient temperature (storage/transport)
Relative humidity	30% ~ 90%

Dimension

Parameter	Data
Width(mm)	98
Thickness(mm)	12.2
Height(mm)	50.6