


Category: 插拔式端子-插座/Plug-in terminal-plug

Product name: MC-PB7.62HXXC-0001

Product Description: 7.62mm , 630V , 12A CE , UL

Product Picture

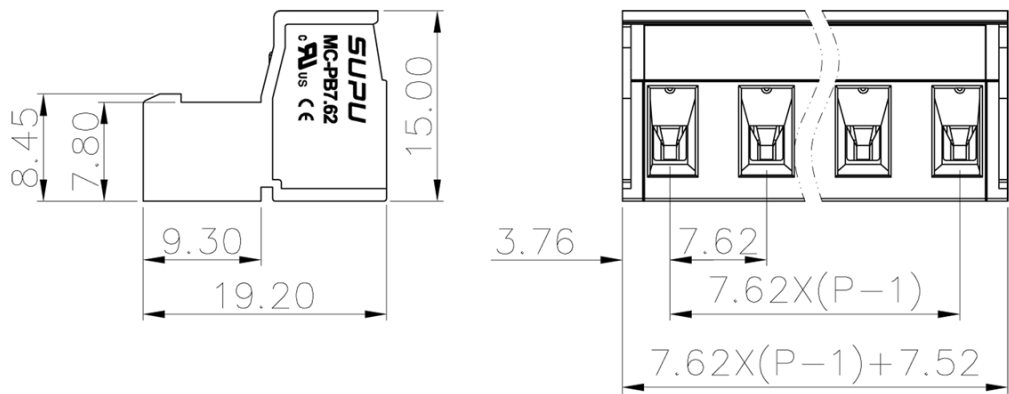

基本信息 /Basic Information

|                               |                       |
|-------------------------------|-----------------------|
| 产品型号<br>SUPU ID               | MC-PB7.62HXXC-0001    |
| 产品间距<br>Pitch                 | 7.62mm                |
| 产品层数<br>Number of levels      | 1                     |
| 产品位数<br>Number of connections | 2P-24P                |
| 接线方式<br>Connection method     | 螺钉接线 Screw connection |
| 防护等级<br>Protection Level      | IP20                  |

|                  |           |  |  |
|------------------|-----------|--|--|
| 工作温度             |           |  |  |
| Work temperature |           |  |  |
|                  | -40~+105℃ |  |  |

## IEC数据 /IEC Data

|                                               |                        |       |       |
|-----------------------------------------------|------------------------|-------|-------|
| 额定电流                                          |                        |       |       |
| Rated Current                                 |                        |       |       |
|                                               | 12A                    |       |       |
| 额定电压                                          |                        |       |       |
| Rated Voltage                                 |                        |       |       |
|                                               | 630V                   |       |       |
| 过压类别                                          |                        |       |       |
| Overvoltage category                          |                        |       |       |
|                                               | III                    | III   | II    |
| 污染等级                                          |                        |       |       |
| Pollution degree                              |                        |       |       |
|                                               | 3                      | 2     | 2     |
| 额定冲击电压                                        |                        |       |       |
| Rated impulse voltage                         |                        |       |       |
|                                               | 6.0KV                  | 6.0KV | 6.0KV |
| 额定电压                                          |                        |       |       |
| Rated Voltage                                 |                        |       |       |
|                                               | 400V                   | 630V  | 1000V |
| 硬导线截面积                                        |                        |       |       |
| Conductor cross section solid                 |                        |       |       |
|                                               | 0.2-2.5mm <sup>2</sup> |       |       |
| 柔性导线截面积                                       |                        |       |       |
| Conductor cross section flexible              |                        |       |       |
|                                               | 0.2-2.5mm <sup>2</sup> |       |       |
| 柔性导线截面积，带绝缘管套                                 |                        |       |       |
| Conductor cross section flexible,with furrule |                        |       |       |
|                                               | 0.2-2.5mm <sup>2</sup> |       |       |
| 锁线螺钉规格                                        |                        |       |       |
| Locking screw Specification                   |                        |       |       |
|                                               | M3                     |       |       |
| 额定扭矩                                          |                        |       |       |
| Rated Torque                                  |                        |       |       |
|                                               | 0.5.N.m                |       |       |
| 固定螺钉规格                                        |                        |       |       |
| Fixed Screw Specification                     |                        |       |       |
|                                               | -                      |       |       |
| 额定扭矩                                          |                        |       |       |
| Rated Torque                                  |                        |       |       |
|                                               | -                      |       |       |
| 剥线长度                                          |                        |       |       |
| Stripping length                              |                        |       |       |
|                                               | 7-8                    |       |       |

## UL数据 /UL Data

|               |      |   |      |
|---------------|------|---|------|
| 使用组别          |      |   |      |
| Use group     |      |   |      |
|               | B    | C | D    |
| 额定电流          |      |   |      |
| Rated Current |      |   |      |
|               | 10A  | - | 10A  |
| 额定电压          |      |   |      |
| Rated Voltage |      |   |      |
|               | 300V | - | 300V |

|                     |          |
|---------------------|----------|
| 额定接线容量              | 24-12AWG |
| Rated cross section |          |

材料信息 /Material Data

|                                        |              |
|----------------------------------------|--------------|
| 绝缘材料                                   | PA66         |
| Insulation material                    |              |
| 绝缘材料组别                                 | I            |
| Insulation material group              |              |
| 阻燃等级，符合UL94                            | V0           |
| Flame retardant grade, UL94 compliance |              |
| 导电体材料                                  | Copper alloy |
| Contact material                       |              |
| 导电体表面镀层                                | Sn,Plated    |
| Surface characteristics                |              |

产品认证 /Product Certification

|             |                                                                                    |
|-------------|------------------------------------------------------------------------------------|
| 认证图标        |  |
| Certificate |                                                                                    |

|             |
|-------------|
| UL证书号       |
| UL file No. |

|         |
|---------|
| VDE证书号  |
| VDE No. |

|         |
|---------|
| TUV证书号  |
| TUV No. |

Ningbo Supu Electronics Co.,Ltd

Zip code: 315303

Fax: +86 574-63288170

E-mail : askme@supu.cn

Address: No. 625, Kandun Town Street, Cixi  
City, Zhejiang Province  
Switchboard: +86 574-63288158  
E-mail : askme@supu.cn  
Service Hotline: 400-626-6336



Code