


Spring-cage connection terminal block- UJ5-6/1 × 2JD - 421034



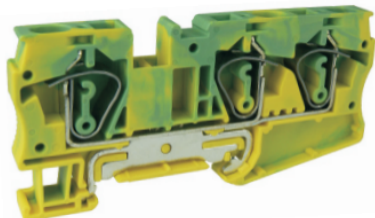

Spring-cage connection terminal block , rated voltage:/, Max. operating current:/, connection method:spring-cage connection, number of connection : 3 , crimping range : 0.5mm² -10mm² , AWG : 24-8 , thickness:8.2mm , height:4.2.2mm , color : yellow-green , mounting type : TH35-7.5、 TH35-15

Product parameter

Parameter	Data
Packing unit (PCS)	40
NW per piece(g)	28.1
Layers	1
Number of connections	3
Rated cross section(mm ²)	10
Color	yellow-green
Insulation material	PA
Flame retardant grade (UL94)	V0
Rated voltage(V)	/
Rated current(A)	/
Temperature of insulation material	-40 ~ +125
Wire feed	Above the terminal

Product certification

Parameter	Data
Certification logo	
Certification logo	
Certification logo	

Parameter	Data
	CCS
Certification logo	c UL[®] US
Certification logo	RoHS

Technical data

Parameter	Data
Connection Method	Spring-cage connection
Stripping length(mm)	12
Solid conductors(mm ²)	0.5-10
Solid conductors AWG	24-8
Stranded conductors(mm ²)	0.5-6
Stranded conductors AWG	24-8
Operating temperature ()	-40 ~ +105
Ambient temperature (storage/transportation) ()	-25 ~ +60
Relative humidity	30% ~ 90%
Connection in acc. with standard	IEC 60947-7-1

Dimension

Parameter	Data
Width(mm)	69.5
Thickness(mm)	8.2
Height(mm)	42.2