




## Headers(Sockets) for pluggable terminal blocks / ECH &amp; EHD series



## 2EHDRM

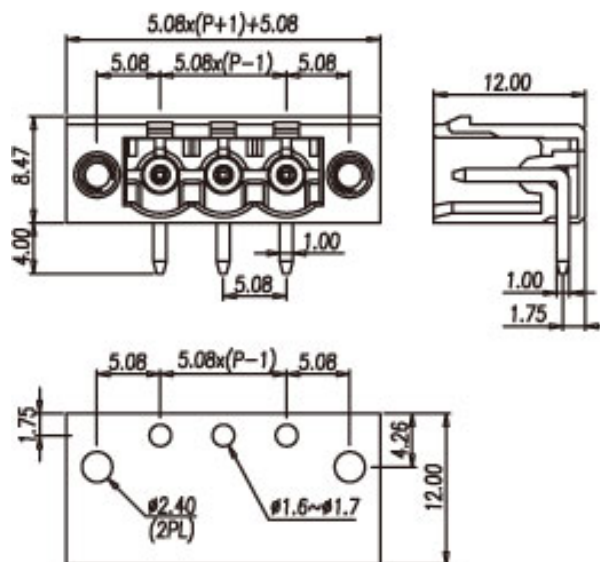

Pitch: 5.08mm

| Approval                                                  |     |      |
|-----------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|
| Technical Data                                            | UL                                                                                                                                                                                                                                                                                                                                                   | IEC  |
| Rated voltage                                             | 300V                                                                                                                                                                                                                                                                                                                                                 | 600V |
| Rated current                                             | 15A                                                                                                                                                                                                                                                                                                                                                  | 18A  |
| Conductor cross-section, solid (AWG/ mm <sup>2</sup> )    |                                                                                                                                                                                                                                                                                                                                                      |      |
| Conductor cross-section, flexible (AWG/ mm <sup>2</sup> ) |                                                                                                                                                                                                                                                                                                                                                      |      |
| Rated surge voltage (UL/IEC/Max.)                         | 1.6 / 4 / 4 KV                                                                                                                                                                                                                                                                                                                                       |      |
| Torque (N-m)                                              |                                                                                                                                                                                                                                                                                                                                                      |      |
| Screw                                                     |                                                                                                                                                                                                                                                                                                                                                      |      |
| Wire strip length                                         |                                                                                                                                                                                                                                                                                                                                                      |      |
| Pole                                                      | Cat. No.                                                                                                                                                                                                                                                                                                                                             |      |
| 02                                                        | 2EHDRM-02P                                                                                                                                                                                                                                                                                                                                           |      |
| :                                                         | :                                                                                                                                                                                                                                                                                                                                                    |      |
| :                                                         | :                                                                                                                                                                                                                                                                                                                                                    |      |
| 24                                                        | 2EHDRM-24P                                                                                                                                                                                                                                                                                                                                           |      |